


GN 369 Cranked handles

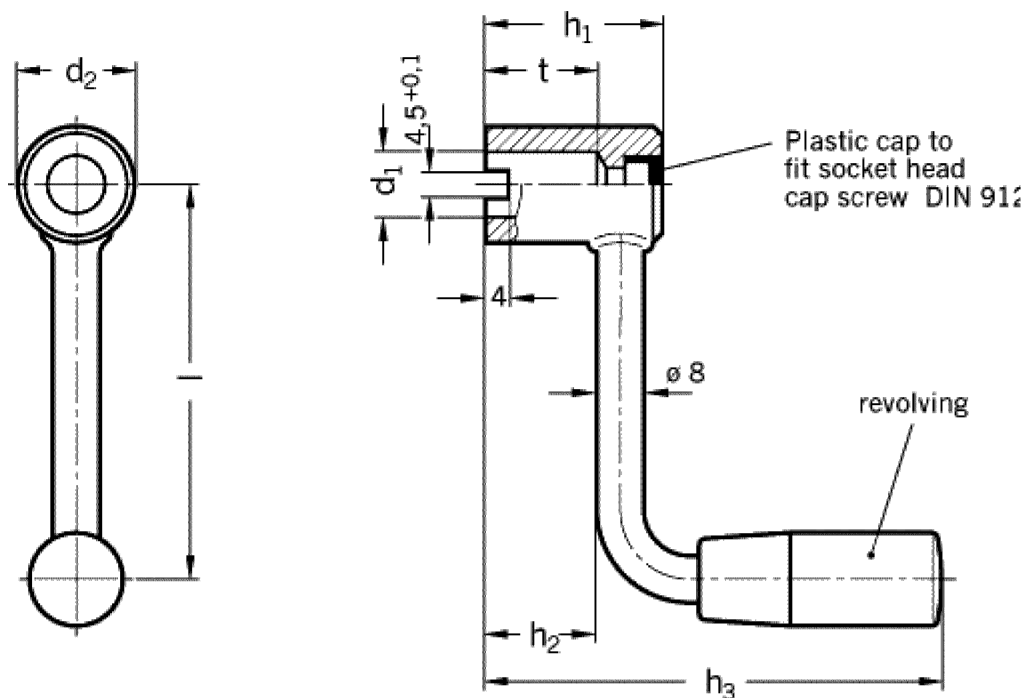

Type **A** without slot

Type **N** with slot

Length l	d1 H9 Bore B	d2	h1	h2~	h3~	t +0,5	Ø Handle	f. screws DIN 912
63	B10	18	28	18	74	18	18	M5
80	B10	18	28	18	74	18	18	M5
100	B12	20	30	20	88	20	21	M6
125	B12	20	30	20	88	20	21	M6

Specification

Steel

shot-blasted and nickel plated

Crank butt-welded

Plastic cap
black

Information

Cranked handles GN 369 are for light duty applications and are of extremely good value. A suitable dowel in the shaft and the slot in the handle provides a cheap connection to the shaft. To secure the handle permanently to the shaft, "remove the plastic cap and insert screw.

Also a simple dowel connection is possible with Type A.

Due to the production method which is not dependent on a specific shape, these cranked handles can be produced as specials at a competitive price.

How to order

Cranked handle

GN 369-80-B10-N

Code no.	369
Length l	80
d1	B10
Type	N